

A NOVEL PRAGMATIC RRW FRAMEWORK TO RESIST UNINTENTIONAL ATTACKS

¹K.Sudhakar, ²Anitha Patibandla

¹Department of ECE, Mallareddy college of Engineering & Technology, Hyderabad, India

²Assistant Professor Department of ECE, Mallareddy college of Engineering & Technology, Hyderabad, India

Abstract

Robust reversible watermarking (RRW) is used to protect the copyrights and providing robustness against unintentional attacks. The past histogram rotation-based methods of suffers from extremely poor invisibility for watermarked images and limited robustness in extracting watermarks from the watermarked images destroyed by unintentional attacks. This paper proposes a wavelet-domain statistical quantity histogram shifting and clustering (WSQH-SC) method and Enhanced pixel-wise masking (EPWM). This method embeds a new watermark image and extraction procedures by histogram shifting and clustering, which are important for improving robustness and reducing run-time complexity. It is possible reversibility and invisibility. By using WSQH-SC methods reversibility, invisibility of watermarks can be achieved. The experimental results shows the comprehensive performance in terms of reversibility, robustness, invisibility, capacity and run-time complexity widely applicable to different kinds of images.

Index Terms—Integer wavelet transform, k-means clustering, masking, robust reversible watermarking (RRW).

1. INTRODUCTION

The concept of reversible watermark firstly appeared in the patent owned by Eastman Kodak (1) Honsingex et al. (1) utilised a robust spatial additive watermark combined with modulo additions to achieve reversible data embedding. Goljan et al. (2) proposed a two cycles flipping

permutation to assign a watermarking bit in each pixel group. Celik et al. (3) presented a high capacity, reversible data-embedding algorithm with low distortion by compressing quantization residues. Tian (4) presented a reversible data embedding approach based on expanding the pixel value difference between neighboring pixels, which will not overflow or underflow after expansion. Thodi and Rodriguez exploited the inherent correlation among the neighboring pixels in an image region using a predictor. Xuan et al. (5) embedded data into high-frequency coefficients of integer wavelet transforms with the commanding technique, and utilized histogram modification as a preprocessing step to prevent overflow or underflow caused by the modification of wavelet coefficients.

Reversible watermarking has found a huge surge of experimentation in its domain in the past decade as the need of recovering the original work image after extracting the watermark arises in various applications such as the law enforcement, medical and military image system, it is crucial to restore the original image without any distortions (6). In traditional watermarking techniques, our main concern is to embed and recover the watermark with minimum loss. The quality of original work image we get after extraction is highly degraded and not restorable. But in applications like law enforcement, medical and military, in which superior quality of image is needed, we cannot use these algorithms. In medical images, some prerequisite information about the patient is watermarked in it while transmitting and at reception we need to have both, the original image and that information is to be recovered loss

without. This type of result is achievable by making use of any reversible watermarking algorithm out of a pool of algorithms (7).

II. PROPOSED METHOD

The following steps are used to embeds the watermark into image.

- Decompose image using 5/3 IWT and divide the sub-band HL into n non overlapping blocks with the size of $h \times w$.
- Compute the mean of wavelet coefficients (MWC) histogram of all of the blocks and obtain S_k .
- Perform EPWM to compute the watermark strength
- **For k = 1 to m do**
- 7 Embed the kth watermark bit b_k with S_w
- $k = S_k + \beta \lambda b_k$;
- **End for**
- Reconstruct the watermarked image I with inverse 5/3 IWT.

The block diagram of proposed method as shown in fig.1.

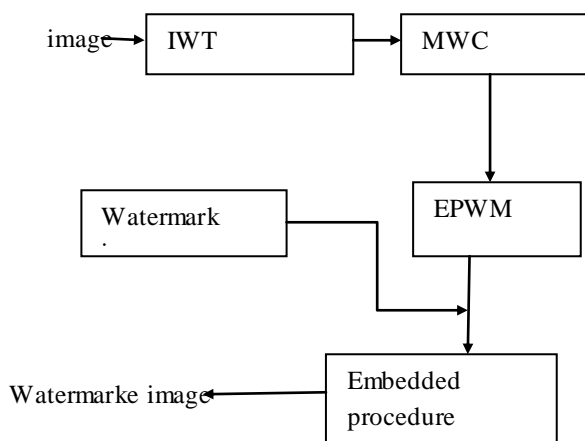


Fig.1. Block diagram of proposed method

A. Inverse wavelet transforms (IWT)

The wavelet transform transforms the image into a multi-scale representation with both spatial and frequency characteristics. This allows for effective multi-scale image analysis with lower computational

cost. Using the IWT, the texture image is decomposed into four sub images, as low-low, low-high, high-low and high-high sub-bands.

L_1L_1	L_1L_2	L_1H_1	L_1H_2
L_2L_1	L_2L_2	L_2H_1	L_2H_2
H_1L_1	H_1L_2	H_1H_1	H_1H_2
H_2L_1	H_2L_2	H_2H_1	H_2H_2

Fig.2. Image decomposition after a two level scaling for IWT

B. Means of wavelet coefficients (MWC) histogram

It is designed in high-pass sub-bands of wavelet decomposition, to which HVS is less sensitive, leading to high invisibility of watermarked images and it has almost a zero-mean and Laplacian-like distribution based on the experimental study of wavelet high-pass sub-bands from 300 test images.

Considering a given host image I , we first decompose I using 2 level IWT to obtain the sub-band and then divide HL into n non overlapping blocks. Let $S = (S_1, \dots, S_k, \dots, S_n)$ be the MWCs in the sub-band, then the MWC of the kth block, S_k , is defined as

$$S_k = \frac{1}{(h-2) \times (w-2)} \sum_{i=2}^{h-1} \sum_{j=2}^{w-1} P_k^{(i,j)}$$

Where $P_k^{(i,j)}$ represents the wavelet coefficient at (i, j) in the k^{th} block

C. Embedded Pixel Wise Masking (EPWM)

It has been well acknowledged that a balance between invisibility and robustness is important for robust watermarking methods. Although many efforts have been made to design lossless embedding models, little progress has been made in this trade-off. Therefore, we develop EPWM

to tackle this problem by utilizing the JND thresholds of wavelet coefficients to optimize watermark strength. To computed the watermark strength is as shown below

$$\lambda = \frac{\alpha}{M \times N} \sum_{i=1}^M \sum_{j=1}^N \text{JND}_{\rho}^{\omega}(i, j)$$

where α is a global parameter and $M \times N$ is the sub-band size.

D. Embedded procedure

We use the obtained JND thresholds to control watermark strength during the embedding process. To be specific, given the MWC of the k th block of interest, i.e., S_k the watermark embedding is given by

$$k = S_k + \beta \lambda b_k ;$$

Here k is the obtained MWC after the k th watermark bit $b_k \in \{0, 1\}$ is embedded, β is a factor defined as

$$\beta = (S_k - S^*) / \text{abs}(S_k - S^*)$$

III. QUALITY MEASUREMENT

PSNR is most commonly used to measure the quality of reconstruction of lossy compression codecs. PSNR is most easily defined via the mean squared error (MSE). Given a noise-free $m \times n$ monochrome image I and its noisy approximation K , MSE is defined as:

$$MSE = \frac{1}{m n} \sum_{i=0}^{m-1} \sum_{j=0}^{n-1} [I(i, j) - K(i, j)]^2$$

The PSNR is defined as:

$$\begin{aligned} PSNR &= 10 \cdot \log_{10} \left(\frac{MAX_I^2}{MSE} \right) \\ &= 20 \cdot \log_{10} \left(\frac{MAX_I}{\sqrt{MSE}} \right) \\ &= 20 \cdot \log_{10}(MAX_I) - 10 \cdot \log_{10}(MSE) \end{aligned}$$

IV. EXPERIMENTAL RESULTS

original image



Fig.3 shows the lena image

EPWM

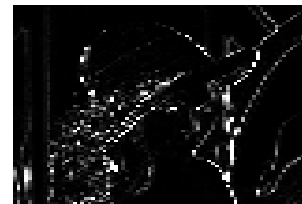


Fig.4. JND thresholds of EPWM method

watermark image

MCK

Fig.5. shows the watermark image

watermarked image



Fig.6. shows the final output (watermarked image)

V.CONCLUSION

In this paper, used for RRWa WSQH-SC method and enhanced pixel-wise masking EPWM. EPWM precisely estimates the local sensitivity of HVS and adaptively optimizes the watermark strength for a trade-off between robustness and invisibility. This techniques improving robustness, reducing run-time complexity and invisibility for watermarked images. It is widely applicable to different kinds of images.

REFERENCES

- (1). Honsinger, C.W., Jones, P., Rabbani, M., and Stoffel, J.C.: 'Lossless recovery of an original image containing embedded data'. US patent no. 6278791, 2001
- (2). Goljan, M., Fridrich, J., and Du, R.: 'Distortion-free data embedding for images'. 4th Information Hiding Workshop, LNCS, vol. 2137, (Springer-Verlag, New York, 2001, pp. 27–41.
- (3). Celik, M.U., Sharma, G., Tekalp, A.M., and Saber, E.: 'Reversible data hiding'. Proc. ICIP, 2002, vol. 2, pp. 157–160
- (4). Tian, J.: 'Reversible data embedding using a difference expansion', IEEE Trans. Circuits Syst. Video Technol., 2003, 13, (8), pp. 890–896.
- (5). Xuan, G.R., Yang, C.Y., Zhen, Y.Z., and Shi, Y.Q.: 'Reversible data hiding using integer wavelet transform and companding technique'. Proc. IWDW, 2004.

(6) J. Tian, "Wavelet-based reversible watermarking for authentication," in Security and Watermarking of Multimedia Contents IV—Proc. SPIE, E. J. Delp III and P. W. Wong, Eds., Jan. 2002, vol. 4675, pp. 679–690.

(7) B. Macq, "Lossless multiresolution transform for image authenticating watermarking," in Proc. EUSIPCO, Sept. 2000, pp. 533–536.



K.Sudhakar, received Bachelor Degree in Electronics and Communications from Thiruvalluvar college of Engg and technology, vandavasi in chennai. Presently he is pursuing his M.Tech in systems and signal processing in Malla Reddy college of Engg and Technology, Hyderabad.



Anitha Patibandla is an Assistant professor at Malla Reddy College of Engineering and Technology, Hyderabad. she received her Bachelor degree in Electronics and communication Engineering from Osmania university college of Engg, Hyderabad. M.Tech in V.L.S.I System Design from J.N.T.U.H affiliated college. She is presently pursuing Research in the area of low power V.L.S.I design at J.N.T.U.H. Her area of interest are low power V.L.S.I design, Communications and image processing.