

TARGET DETECTION IN WSN USING POLYGON BASED FRAMEWORK

S. KRISHNA KUMAR^[1] V. KARTHIKAYAN^[2] BYREDDY SREEKANTH REDDY^[3]
J. ESTHER^[4]

Department of Electronics & Communication

Dr. S.J.S Paul Memorial College of Engineering and Technology, Puducherry, India

Email id: krishsachin30@gmail.com^[1], karthivelu.kk@gmail.com^[2], redysreekanth@gmail.com^[3]

Abstract: Target tracking is one of the key applications of WSNs. Offered work mostly requires organizing group of sensor nodes with measurements of a target's actions or exact distance measurements from the nodes to the target, and predict those movement. These are, nevertheless, often difficult to correctly achieve in practice, particularly in the case of unpredictable environments, sensor faults, etc. In this thesis, we suggest a new tracking framework, called Facetrack, which employ the nodes of a spatial region nearby a target, called a face. As an alternative of predicting the target location individually in a face, we calculate approximately the target's moving in the direction of another face. We launch an Edge Detection Algorithm to generate each face further in such a way that the nodes can set up in front of the target's moving, which significantly helps tracking the target in a suitable fashion and getting better from special cases, example, Sensor Fault, Loss of Tracking. Moreover, we extend an Optimal Selection Algorithm to choose which sensors of faces to doubt and to advance the tracking data. When compared with presented work, it gives that Facetrack achieves improved tracking exactness and energy effectiveness. We moreover confirm its effectiveness by means of a Proof-Of-Concept system of the Imote 2 sensor proposal.

Key Words WSN, Target Tracking, Edge Detection, Face Tracking, Brink recognition structure, Sensor Selection, mobile target.

I.INTRODUCTION:

Wireless sensor networks (WSNs) have gain a plenty of awareness in both the community and the study communities since they are predictable to bring the communication between humans, environments, and machines to a new pattern. WSNs were initially developed for military purposes in theatre of war supervision; nevertheless, the expansion of such networks has optimistic their use in healthcare, ecological industries, and for monitor or tracking targets of interest.

Sensor nodes are knowledgeable when the automobile under observation is exposed,

while a number of nodes (for example black nodes) notice the vehicle and fire a alertness message to the nodes on the vehicle's predictable moving path, so as to arouse them up.

Apart from of a variety of types of targets, there are three common events involved in offered solutions of target tracking.

1) sensor nodes should be confined to a small area with as few errors as probable and a expanse measurement from the nodes to a target, or a measurement of the target's movements is essential.

2) nodes should be structured into groups to follow a mobile target.

3) leader sensors generally report the object's movement to a innermost drop

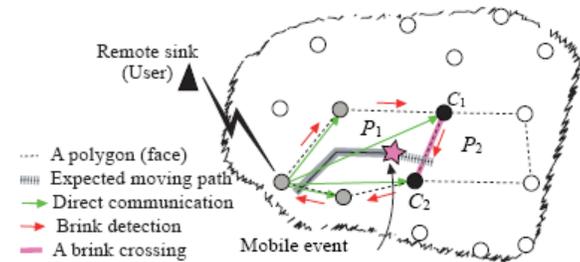


Fig. 1. An paradigm application with a drop showing a automobile being followed through a multilateral-fashioned area.

On the subject of these measures above, if we would like to work with situation like that of Fig. 1, achieving high precision of tracking mutually with energy effectiveness in WSNs is not a easy problem, owing to numerous apparent difficulties:

- Categorize groups of nodes with exact measurements of a object's movements is tricky, as WSNs are opaque/sparse, unattended, untethered, and set up in usually impulsive environments.
- Acquire exact object localization is impractical in a real operation field, still when unusual kinds of noises/turbulence are supplementary during recognition.
- Sustaining operations of nodes in a well-timed fashion is tricky, i.e., spinning their services off mainly of the time, and permitting only a cluster of nodes to be practical in the object's moving path, as in Fig. 1.

Defeat of tracking or node failure is frequently possible, since WSNs are horizontal to fault or failures

II.BLUEPRINT OF FACETRACK:

In sequence to explain the problem of distinguishing the movement of a object as an

unauthorized object traversal difficulty in the course of polygon following, we see an paradigm of the produced polygons as shown in Fig. 2. We utilize polygons to illustrate the object moving path. The polygon is not essentially a curved, but it should not be self-overlapping. Assent to a number of nodes in a polygon be $P_N = (v_1, v_2, \dots \dots \dots v_p)$, where $p \leq 3$. Deduce that the object is detected by some nodes someplace in the WSN, and it is bounded by the nodes in a polygon, example P2. Then, P2 is called an active polygon (P_c), and nodes (e.g., v_5) in P2 are dynamic nodes. Fig. 2, P1 is a three-sided figure, P2 is a pentagon, and P7 is a four-sided figure.

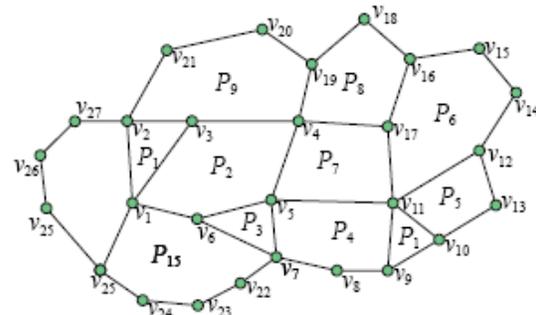


Fig. 2. An example of the sensor network, demonstrating polygonal shaped regions (or faces).

Node v_5 in P_2 is conscious of the following sequence: 1) its possess information; 2) the information of its adjoining (or 1-hop) neighbors $v_4, v_{11}, v_7,$ and v_6 ; 3) the information of its dynamic neighboring nodes $v_6, v_1, v_3,$ and v_4 ; 4) the information of the neighbors in $P_2, P_3, P_4,$ and P_7 in the course of direct announcement or the 1-hop in-between nodes after consumption. Thus, v_5 stores information regarding four polygons that are bordering to it in $G - \{v_5; v_4; v_{17}; v_{11}\}, \{v_6; v_{11}; v_{19}\}, \{v_8; v_7\}, \{v_5; v_7; v_6\},$ and $\{v_5; v_6; v_1; v_3; v_4\}$.

A.BRINK RECOGNITION ALGORITHM:

We launch an edge recognition algorithm, which is second-hand to restructure

another theoretical polygon, called a significant area, by creating a border, called a threshold, to the dynamic polygon, P_c . As the threshold is generated on the margin of P_c , the polygonal area problem revolves into a significant area problem. In the algorithm, our intention is to sense the threshold, while the object is moving to a threshold between CNs, that validates that the object is leaving P_c and affecting to P_f , which could permit for following the object in a well-timed fashion. As clarified before, existing in the online supplemental substance, after the recognition of the object and the restoration of P_c around the object, this algorithm is functional during the object movement from P_c to P_f . The follow smudge is divided into the following three-chapter recognition smudges.

- **Square recognition phase:** This involves that the object is preliminarily distinguished by several two nodes inside P_c but does not pledge that the object may cross the threshold among them.
- **Rectangular recognition phase:** This involves that the object may cross the threshold among the nodes.
- **Crossing phase:** This involves that the object is regarding to cross the threshold among the node.

B.OPTIMAL NODE SELECTION ALGORITHM (O_N):

Normally, following an object involves an most select number of sensors in

the network to cumulative information between the sensors. By means of FaceTrack, between the offered sensors in a polygon, not all of the sensors supply useful data that progresses exactness. Predominantly, if the amount of sensors in a polygon is bulky, we need to diminish the number of dynamic sensors. Additionally, some data might be practical, but unnecessary

We suggest an most favorable selection method to desire the suitable sensors, which can effect in having the top recognition and a low down power charge for transmitting data diagonally the polygon; this also keeps both energy and bandwidth costs. We have previously explain a localized polygon method, and the idea of steering without knowing universal facts about sensor position. A collection function

sensor choice, and polygonal area addition in the case of blunders in the WSN or failure of following) are continued throughout the object following. is employed to select the suitable sensors on the object's moving path, and is based on the local resolution of all of the sensors in a polygon.

After the threshold is created among the CNs, the nodes uncertainty and send a memo to all of the nationals (NNs) that communicate to the advance polygon. The memo contains the assessment of the object and sender data. While getting the memo, each NN mingles its individual measurements of the object with the CNs' assessment.

III. MOVEMENT DETECTION THROUGH POLYGON TRACKING:

In the establishment, when an object is distinguished by various nodes, available in the online supplemental substance, the

nodes correspond to all of its neighboring with their recognition data, and recreate the polygon (Step 2). Once the object is enclosed by the boundary of a polygon, it turns into P_c . Step 3 to 5 (including threshold recognition in the course of the three-chapter recognition, best possible sensor choice, and polygonal area addition in the case of blunders in the WSN or failure of following) are continued throughout the object following. is employed to select the suitable sensors on the object's moving path, and is based on the local resolution of all of the sensors in a polygon.

After the threshold is created among the CNs, the nodes uncertainty and send a memo to all of the nationals (NNs) that communicate to the advance polygon. The memo contains the assessment of the object and sender data. While getting the memo, each NN mingles its individual measurements of the object with the CNs' assessment.

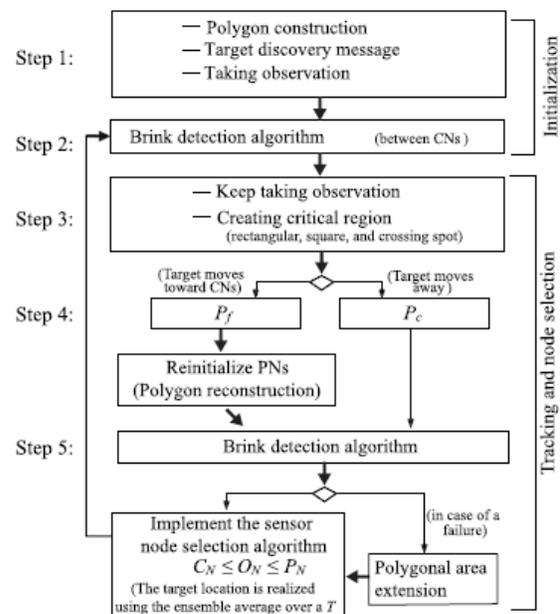


Fig. 3. design of polygon-supported following structure

A.ERROR TOLERANCE AND TACKLING LOSS OF TRACKING:

Normally, the WSN planarization does not have any error acceptance support. Thus, originally erected polygons may not be conserved throughout following. While the object is moving to P_f , if a node cannot implement itself (i.e., it is out of examine because of an interior fault such as battery exhaustion, deteriorating to sense itself, or misplaced from its location) or there is a relation failure owing to inter-node wireless channel fluctuations, following can be broken up. These effects in the event of defeat of tracking. There are numerous ways that we moderate these condition by using the outer area of P_c , by means of expanding the polygon area exposure, or amalgamation two or extra polygons into one. A detailed

explanation on the error tolerant recognition and tracking,

IV. SIMULATION RESULTS:

We evaluate the following presentation in terms of exactness, based on the energetic touching path, with the best possible path similarities (PM), GNS, and ANS. We examine the mean and highest tracking fault found, which is exposed from the presentation results grouped by all of the nodes that engage in following over 100 imitation runs.

Fig. 4. The outcome of noise on tracking errors

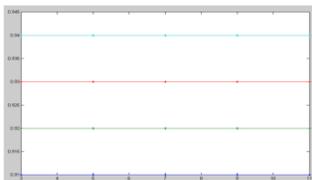


Fig. 4 describes the presentation of different s_i for the backdrop noise, where the xlabel gives the σ_i and the ylabel gives the TEF(meter). It specifies that the noise takes in some tracking faults. Nevertheless, FaceTrack shows moderately minimum errors evaluated with others, i.e., 20 to 50% lesser in the case of mean faults, and 30 to 50% lesser in the case of maximum faults.

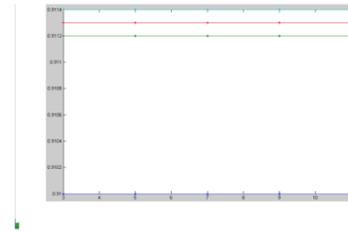


Fig. 5. the outcome of the number of nodes on tracking errors

Fig. 5 illustrates that the tracking error diminishes (i.e., the exactness of tracking enlarges) with an growing P_N , and xlabel gives the P_N and ylabel gives the TEF(meter) and the polygon-based following in FaceTrack evidently realizes a superior presentation evaluated with all PM, ANS, and GNS.

V. CONCLUSION:

The major functionality of a observation WSN is to follow an unauthorized object in a field. The confront is to establish how to recognize the object in a WSN proficiently. We projected a exclusive idea to attain a WSN system for distinguishing movements of a target using polygon (face) tracking that does not adopt any prediction method.

Evaluation results demonstrated that the proposed Tracking framework can approximation a target's positioning area, achieve tracking ability with high accuracy, and reduce the energy cost of WSNs. From the structure, two facts can be highlighted emphatically: 1) the object is always detected inside a polygon by means of a threshold detection, and 2) it is robust to sensor node failures and target localization

errors. Two interesting problems, which we are currently investigating, are as follows: 1) the performance of variable brink lengths of the polygon versus adjustable transmission power levels in a WSN for target detection and its energy cost in the WSNs; 2) the impact of the target's dynamic movements, brink detection, and real-time polygon forwarding in target tracking.

VI. REFERENCES:

- [1] Guojun Wang, Jiannong Cao, Md Zakirul Alam Bhuiyan "Detecting Movements of a Target Using Face Tracking in Wireless Sensor Networks" *IEEE Transactions on Parallel and Distributed Systems* vol. 25, no. 4, April 2014
- [2] Y. Wang, M. Vuran, and S. Goddard, "Analysis of event detection delay in wireless sensor networks," in *Proc. of IEEE INFOCOM*, 2011, pp. 1296–1304.
- [3] Z. Zhong, T. Zhu, D. Wang, and T. He, "Tracking with unreliable node sequence," in *Proc. of IEEE INFOCOM*, 2009, pp. 1215–1223.
- [4] W. Zhang and G. Cao, "Dynamic convoy tree-based collaboration for target tracking in sensor networks," *IEEE Transactions on Wireless Communications*, vol. 12, no. 4, pp. 1689–1701, 2004.
- [5] Z. Wang, W. Lou, Z. Wang, J. Ma, and H. Chen, "A novel mobility management scheme for target tracking in cluster-based sensor networks," in *Proc. of IEEE DCOSS*, 2010, pp. 172–186.
- [6] L. M. Kaplan, "Global node selection for localization in a distributed sensor network," *IEEE Transactions on Aerospace and Electronic Systems*, vol. 42, no. 1, pp. 113–135, 2006.
- [7] T. He, P. Vicaire, T. Yan, L. Luo, L. Gu, G. Zhou, R. Stoleru, Q. Cao, J. Stankovic, and T. Abdelzaher, "Achieving real-time target tracking using wireless sensor networks," in *Proc. of IEEE RTAS*, 2006, pp. 37–48.
- [8] Q. Huang, S. Bhattacharya, C. Lu, and G.-C. Roman, "FAR: Face aware routing for multicast in large-scale sensor networks," in *ACM Transactions on Sensor Networks*, 2005, pp. 240–271.
- [9] L. M. Kaplan, "Local node selection for localization in a distributed sensor network," *IEEE Transactions on Aerospace and Electronic Systems*, vol. 42, no. 1, pp. 136–146, 2006.
- [10] Z. Wang, W. Lou, Z. Wang, J. Ma, and H. Chen, "A novel mobility management scheme for target tracking in cluster-based sensor networks," in *Proc. of IEEE DCOSS*, 2010, pp. 172–186.
- [11] X. Wang, M. Fu, and H. Zhang, "Target tracking in wireless sensor networks based on the combination of KF and MLE using distance measurements," *IEEE Transactions on Mobile Computing*, vol. 11, no. 4, pp. 567–576, 2012.
- [12] Ossi Kaltio and Maurizio Bocca, "Real-Time Intrusion Detection and Tracking in Indoor Environment Through Distributed RSSI Processing", Aalto University School of Electrical Engineering

- [13] Enyang Xu, Zhi Ding and Soura Dasgupta, "Target Tracking and Mobile Sensor Navigation in Wireless Sensor Networks", *Ieee Transactions On Mobile Computing*, Vol. 12, No. 1, January 2013, pp. 177-186
- [14] Guojun Wang, Md Zakirul Alam Bhuiyan, Jiannong Cao, and Jie Wu, "Detecting Movements of a Target Using Face Tracking in Wireless Sensor Networks", *Ieee Transactions On Parallel And Distributed Systems*.
- [15] Y.-J. Kim, R. Govindan, B. Karp, and S. Shenker, "Geographic Routing Made Practical," *Proc. USENIX Networked Systems Design and Implementation (NSDI)*, pp. 217-230, 2005.
- [16] M.A. Rajan, M.G. Chandra, L.C. Reddy, and P. Hiremath, "Concepts of Graph Theory Relevant to Ad-Hoc Networks," *J. Computers, Comm. and Control*, vol. 3, no. 2008, pp. 465-469, 2008.
- [17] Q. Huang, C. Lu, and G.-C. Roman, "Mobicast: Just-in-Time Multicast for Sensor Networks under Spatiotemporal Constraints," *Proc. ACM/IEEE Int'l Conf. Information Processing in Sensor Networks (IPSN)*, pp. 442-457, 2003.
- [18] K. Liu, N. Abu-Ghazaleh, and K.D. Kang, "JiTS: Just-in-time Scheduling for Real-Time Sensor Data Dissemination," *Proc. IEEE Pervasive Computing and Comm. (PerCom)*, pp. 42-46, 2006.
- [19] M.Z.A. Bhuiyan, G. Wang, and J. Wu, "Polygon-Based Tracking Framework in Surveillance Wireless Sensor Networks," *Proc. IEEE Int'l Conf. Parallel and Distributed Systems (ICPADS)*, pp. 174-181, 2009.
- [20] L.M. Kaplan, "Local Node Selection for Localization in a Distributed Sensor Network," *IEEE Trans. Aerospace and Electronic Systems*, vol. 42, no. 1, pp. 136-146, Jan. 2006.
- [21] TinyOS Reference Manual, <http://www.tinyos.net>, 2013.
- [22] M.Z.A. Bhuiyan, G. Wang, and J. Wu, "Target Tracking with Monitor and Backup Sensors in Wireless Sensor Networks," *Proc. IEEE Int. Conf. Computer Comm. And Networks (ICCCN)*, pp. 1-6, 2009.
- [23] J. Cartigny, F. Ingelrest, D. Simplot, and I. Stojmenovic, "Localized LMST and RNG Based Minimum-Energy Broadcast Protocols in Ad Hoc Networks," *Ad Hoc Networks (Elsevier)*, vol. 3, no. 2, pp. 1-16, 2005.
- [24] G. Toussaint, "The Relative Neighborhood Graph of Finite Planar Set," *Pattern Recognition*, vol. 12, no. 4, pp. 261-268, 1980.
- [25] M. Crocker, *Handbook of Acoustics*. John Wiley & Sons, 1998. [25] M.D. Berg, M.V. Kerveid, M. Overmars, and O. Schwarzkof, *Computational Geometry*. Springer, 1998.